



Main Features

- ♦ NVIDIA® Maxwell™ architecture with 128 NVIDIA® CUDA® cores
- ♦ Supports multiple AI frameworks including Tensorflow, Caffe, and PyTorch
- ♦ Support TensorRT, DeepStream SDK and other AI tools
- ♦ Support 5G, 4G
- ♦ Fanless embedded design, DC 9 to 30V wide voltage input, complete I/O interface, supports wall hanging and rail installation

Product Overview

Coeus 3401 is a fan-less design box pc with NVIDIA® Jetson Nano™ core, up to 0.5 TFlops computing power, supports multiple AI frameworks, provides rich I/O interfaces, and uses fanless heat dissipation and industrial wide temperature design. It supports 5G, 4G expansion, and can communicate with terminals through various forms, reducing the forwarding and processing time during data transmission, significantly reducing communication delay, sharing the pressure of cloud data calculation, and reducing network traffic costs.

For real-time, our NexRTOS + IGH can help you to develop EtherCAT Master application and control Servo drive/motor & Distributed I/O in real time. This is a very ideal solution that can quickly produce artificial intelligence product prototypes and accelerate the time to market.

AI environment

- ♦ Ubuntu18.04
- ♦ CUDA Toolkit
- ♦ cuDNN
- ♦ Multimedia
- ♦ VisionWorks
- ♦ OpenCV
- ♦ TensorRT
- ♦ VPI on target
- ♦ DeepStream
- ♦ Container Runtime

Specifications

CPU Support

- ♦ Quad-core ARM® Cortex-A57 MPCore processor

GPU

- ♦ NVIDIA® Maxwell™ architecture with 128 CUDA cores

Memory

- ♦ 4GB 64-bit LPDDR4x

Storage

- ♦ 16G eMMC

I/O Interface-Front

- ♦ 2 × USB3.0
- ♦ 1 × RJ45LAN
- ♦ 1 × HDMI
- ♦ 1 × PWR indicator light
- ♦ 1 × SYS indicator light

- ♦ 1 × Line Out
- ♦ 1 × Power switch
- ♦ 2 × Antenna reservation

I/O Interface-Bottom


- ♦ 1 × Power connector
- ♦ 1 × GPIO (4DI & 4DO)
- ♦ 2 × COM (Not all signal, 1*DB9 Form lead, COM1 RS-232/422/485; COM2 RS-232)
- ♦ 1 × OTG
- ♦ 1 × Recovery
- ♦ 1 × Ground screw hole

Expansion


- ♦ 1 × Micro SD
- ♦ 1 × M.2 B Key 3052 (USB3.0/USB2.0/SIM)



Software Application Service

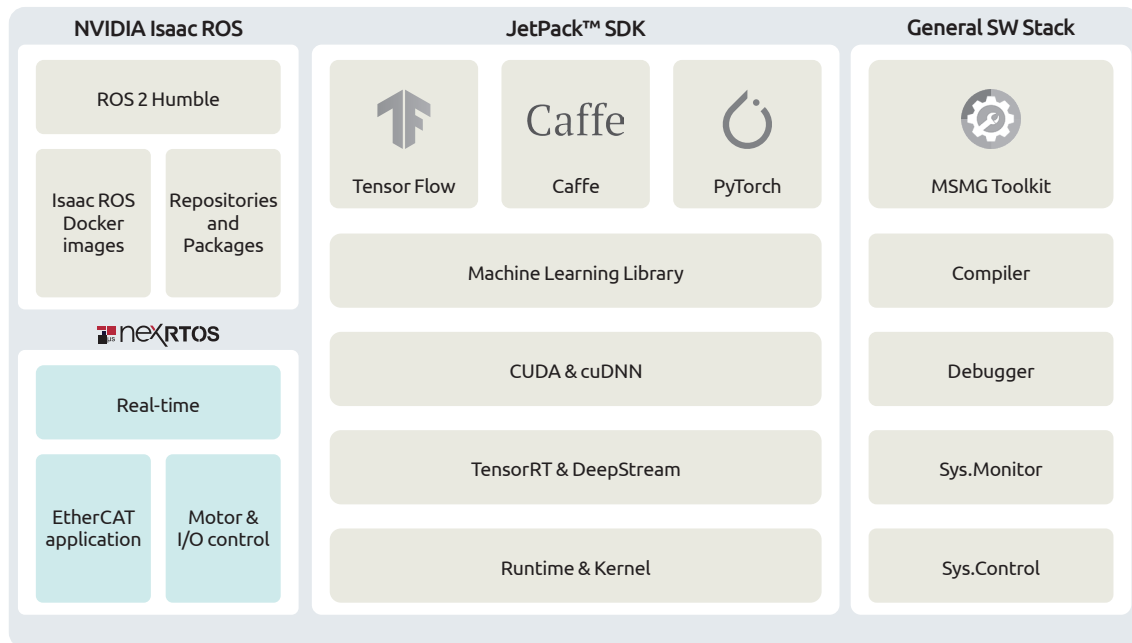

Dimension Drawing

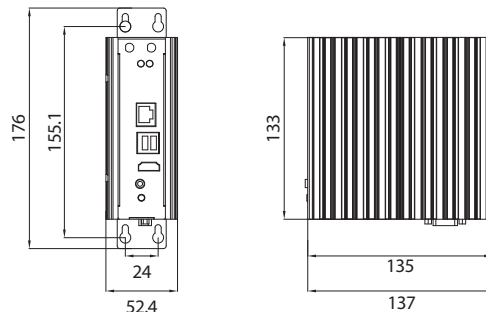

Power Requirement

- DC 9 to 30V wide voltage

Dimensions

- 52.4mm (W) x 137mm (D) x 176mm (H)

Installation

- wall-mounting and rail installation

Operating temperature

- -10°C to 55°C with air flow

Storage temperature

- -20°C to 80°C

Working humidity

- 40°C, 95% relative humidity, no condensation

Ordering Information

- Coeus 3401 (P/N: 10JD0340100XH)

NVIDIA® Jetson Nano™, 1xLAN, 1xHDMI, 1xLin out, 4xDI, 4xDO, 1xRS232, 1xRS232/422/485, 1xOTG