



Software Application Service

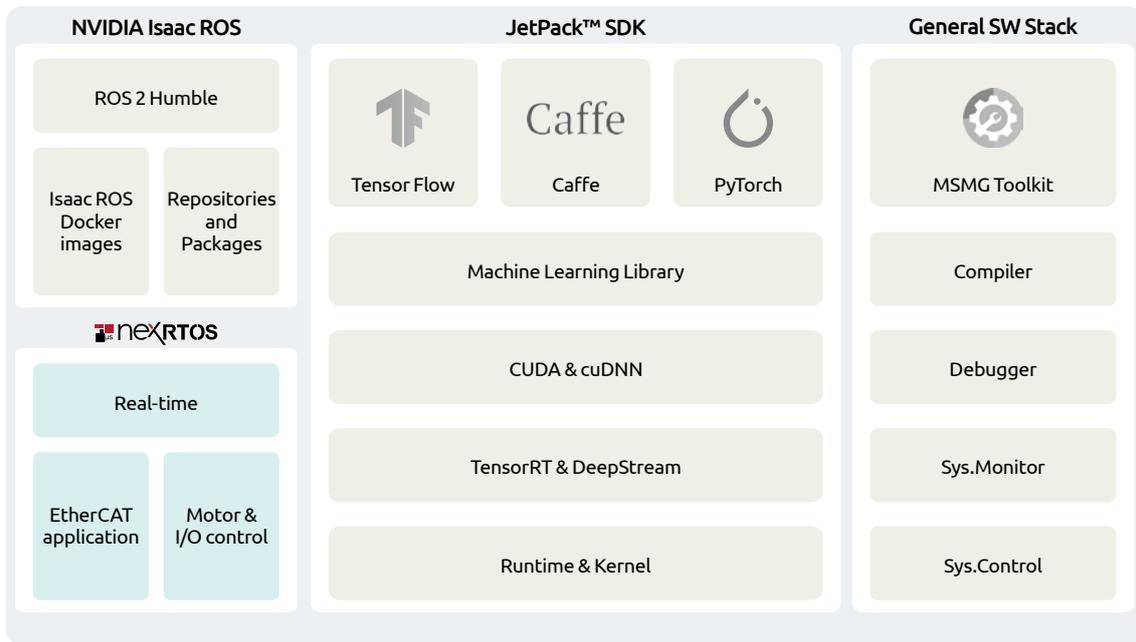

Dimension Drawing

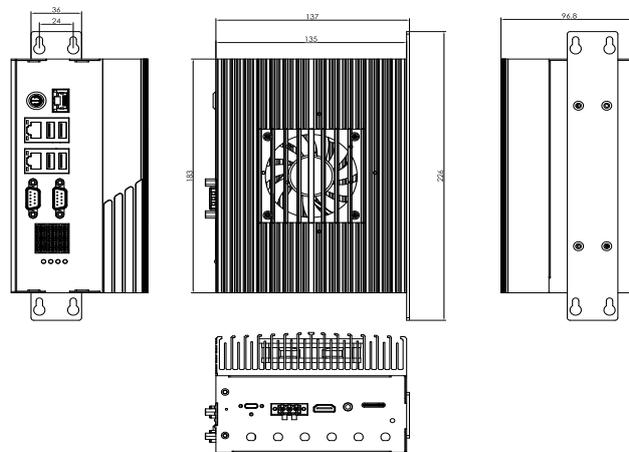

- 1 × M.2 B-Key 3052 (supports USB 3.0/USB 2.0/SIM)
- 2 × MIPI CSI-2
- Option Fan: DC 12V 7015 2x Ball Bearing

Power Requirement

- DC 12 ~ 30V

Relative humidity

- 40°C, 95% (non-condensing)

Dimensions

- 96.8mm (W) x 137mm (D) x 226mm (H)

Installation

- wall-mounting and rail installation

Operating temperature

- -10°C to 55°C with air flow

Storage temperature

- -20°C to 80°C

Working humidity

- 40°C, 95% no condensation

Ordering Information

- Coeus 3910T (P/N: 10JD3901T00XH)

NVIDIA® Jetson AGX Orin™ 64GB, 3xLAN, 1xHDMI, 1x Lin out, 4xDI, 4xDO, 1xRS232, 1xRS232/422/485, 1x OTG

- Coeus 3910T-32 (P/N: 10JD3901T01XH)

NVIDIA® Jetson AGX Orin™ 32GB, 3xLAN, 1xHDMI, 1x Lin out, 4xDI, 4xDO, 1xRS232, 1xRS232/422/485, 1x OTG